

Tools required

Spanner Screwdriver Allen Key Drill and Hammer
Screws and plugs supplied are for masonry only, for any other structure a suitable plug and screw must be used

Installation

I. Pre-Assembly General Instructions

This product is shipped with the bent spout and main body shipped separately. Please follow the step-by-step installation procedure below.

II. Step-by-Step Installation Procedure

(I) Pre-assembly of Base and Main Body (Operation under the countertop)

Under the countertop, first assemble the inner insert of the triangular fixing seat with the triangular fixing seat. Fit the rubber gasket onto the straight pipe and assemble it together with the wall cover. After positioning correctly, fasten the triangular fixing seat with pointed hexsocket screws. Align the expansion screws with mounting holes and tighten with hex nuts. Adjust the verticality of the mainbody riser pipe to ensure the base fits flush against the countertop without warping or looseness.

Pre-assemble waterinlet components: Take out two braided inlet hoses. Connect one end of each hose to the inlet ports on both sides of the main body, and connect the other ends to hot water and cold water outlet connectors. Connect one end of the stainless steel double lock flexible hose to the reserved port at the bottom of the main body to complete pre-assembly. Assemble the other end to the hand shower and place it on the shower bracket.

(II) Connect Spout to Body

After firmly fixing the body on the countertop, take the pre-assembled spout assembly. Insert it vertically into the top socket of the faucet body. Tighten the bottom locking connector by hand. Make sure the spout sits straight without tilting. Turn the spout for testing. It should rotate smoothly without jamming or collision.

III. Matching Technical Requirements

Separately pre-assemble the spout before connecting it to the body. This method makes installation easier, suitable for narrow working space under countertops. Separate assembly prevents the spout from being knocked and scratched during full-unit installation, protecting the bright surface finish. Test rotation after fitting the spout. The movable part must turn smoothly without jamming. Carry out water pressure test to check all joints of spout and body. Prevent water leakage.

Cleaning

To maintain the surface finish of your product, wipe clean regularly, using a clean damp cloth and dry cloth to polish. Do not use abrasive cleaning agents or materials on the product surface as you may invalidate your guarantee. Should any harsh chemicals come into contact with the surface of the product during bathroom cleaning, rinse off immediately, wipe clean and dry.

Troubleshooting

- Dripping tap : Check leaking issue, remove and clean the cartridge, then replace it if needed.
- Diverter not diverting: Remove the diverter, check and clean, then replace it if needed.Could it be insufficient pressure, so pressure needs to be checked.
- Poor flow: May be due to a blockage, so the water supply pipes need to be checked for blockages and or kinks.
- Have the isolation valves been opened fully.
- No flow: May be due to a blockage, so the water supply pipes need to be checked for blockages and or kinks.
- Have the isolation valves been opened fully
- Mixer moving when installed: check bottom fixing is fully secured

USER MANUAL



Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.



Product Name: Floor Standing Bath Shower Mixer
Product Code: ARBBFSCH ARCHFSCH



- Single person assembly
- Tools required
- We always recommend using professional tradespeople to install your product

For more information

- visit betterbathrooms.com
- email customerservices@buyitdirect.co.uk
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA



Part of the BuyItDirect Group

Congratulations on your purchase

And welcome to our growing gang of savvy shoppers

We're on a mission to bring you extraordinary bathroom products, for less. From modern to traditional style ceramics, plus the gorgeous fixtures, fittings and furniture to match. So, you can fall in love with your space every single day.

As one of the UK's largest independent bathroom stores, we've received countless awards; including the National Business Awards UK, the Digital Entrepreneur Awards and being placed on The Sunday Times Fast Track 100.

We hope your new product goes above and beyond your expectations. However, should any problems occur, please:

- log in to your account and contact our customer services team via your self-serve portal – betterbathrooms.com/CustomerAccount/Login
- contact us via betterbathrooms.com/content/contact-us

Important information


- Please read these instructions thoroughly and retain for future reference
- Pressures should meet minimum stated on the website
- Pressures must be balanced for optimum performance
- Always check for pipes and cables before drilling
- System must be flushed through prior to installation
- Recommend working pressure:0.5 bar to 3 bar

FLOW RATE

Min/Bar	0.2bar	0.5bar	1bar	2bar	3bar
ARCHFSCH	7.9	12.2	17.2	24.4	30.0
ARBBFSCH	7.9	12.2	17.2	24.4	30.0

Contents

Dimension Drawings

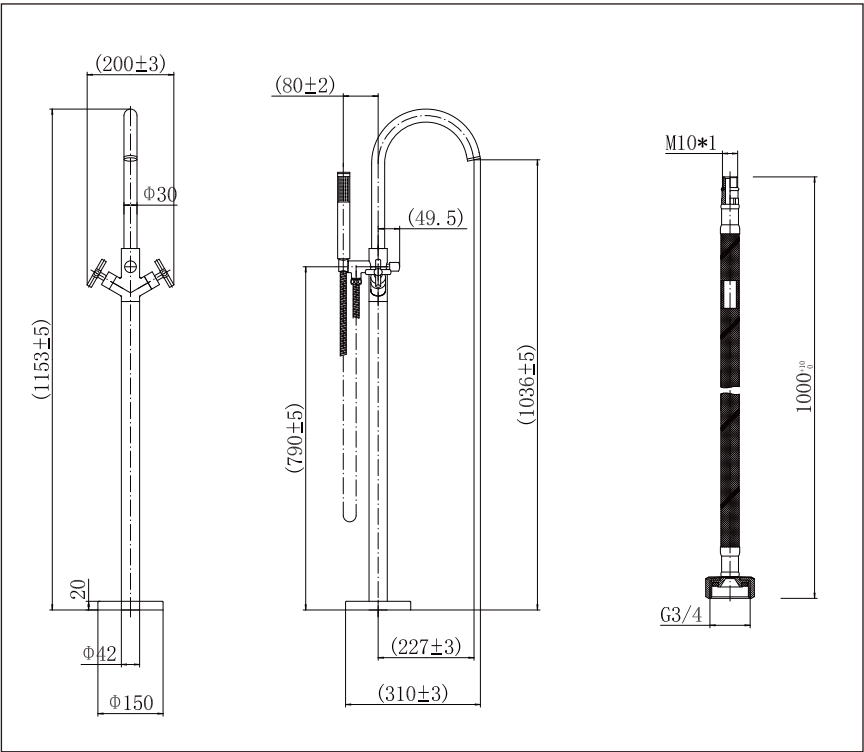

ARBBFSCH
ARCHFSCH

Parts / Diagrams

