


USER MANUAL



Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.

better 
bathrooms

Product Name :Tileable Bench
Product code:LAGB1200

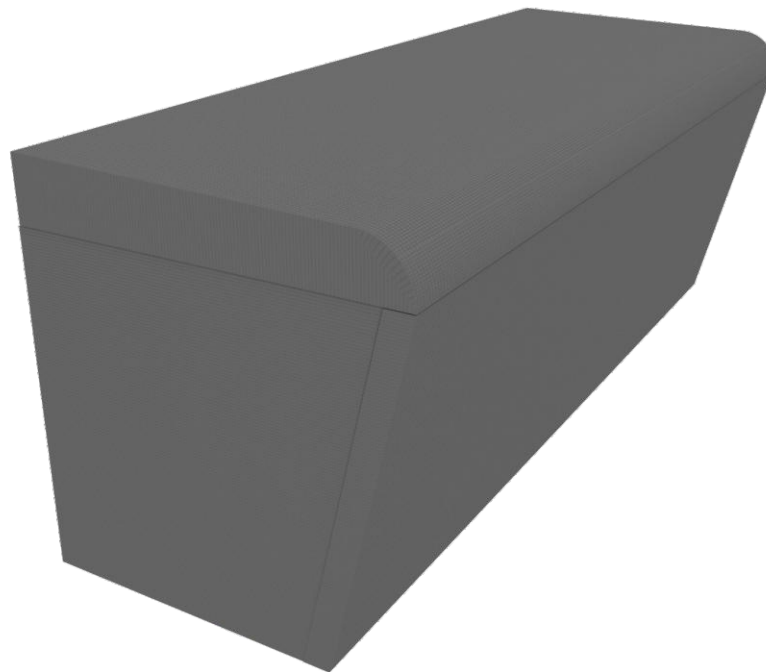

- **Single-person assembly**
- **Tools required**
- **We always recommend using professional tradespeople to install your product**

V1_19/5/26

Congratulations on your purchase

And welcome to our growing gang of savvy shoppers

We're on a mission to bring you extraordinary bathroom products, for less. From modern to traditional style ceramics, plus the gorgeous fixtures, fittings and furniture to match. So, you can fall in love with your space every single day.

As one of the UK's largest independent bathroom stores, we've received countless awards; including the National Business Awards UK, the Digital Entrepreneur Awards and being placed on The Sunday Times Fast Track 100.


We hope your new product goes above and beyond your expectations. However, should any problems occur, please:

- log in to your account and contact our customer services team via your self-serve portal – betterbathrooms.com/CustomerAccount/Login
- contact us via betterbathrooms.com/content/contact-us



Important information

- Please read these instructions thoroughly and retain for future reference


Dimensions

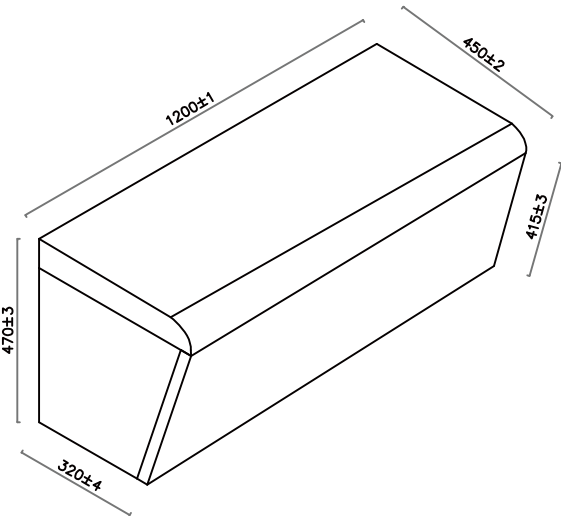


Finished product view

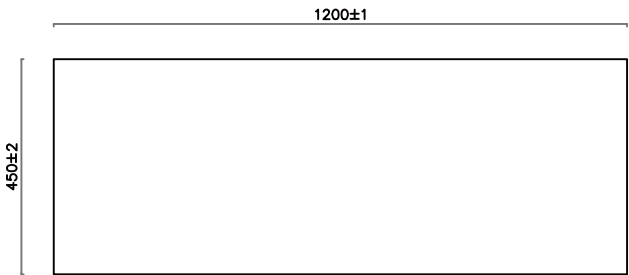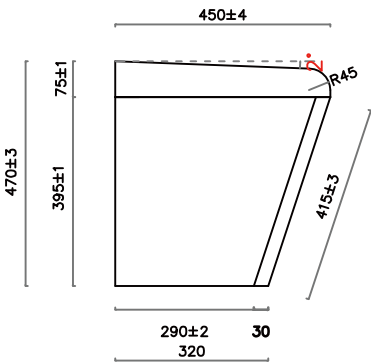

Top board x1

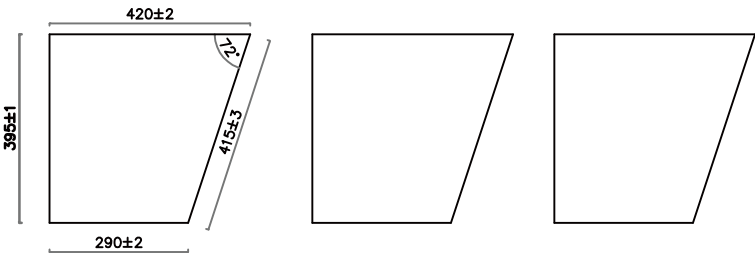

5cm thick support board x 3

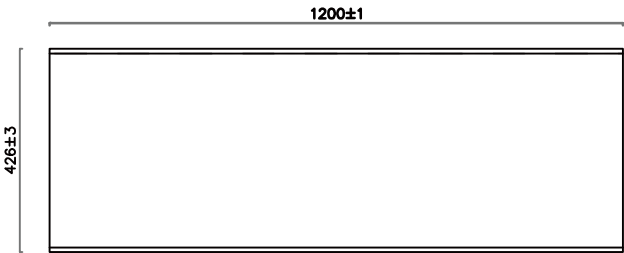


3cm thick front board x1


Tools required

Modified Silicone Sealant


Installation

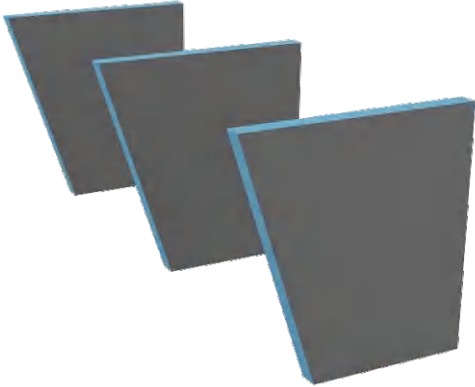

1. Equally space the three 50mm support pieces on the floor and glue on their top sides.
(Suggest use Modified Silicone Sealant.)

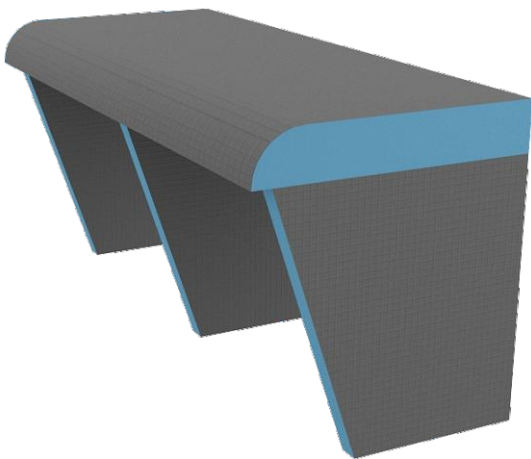

2. Glue the 75mm top piece to the support pieces.

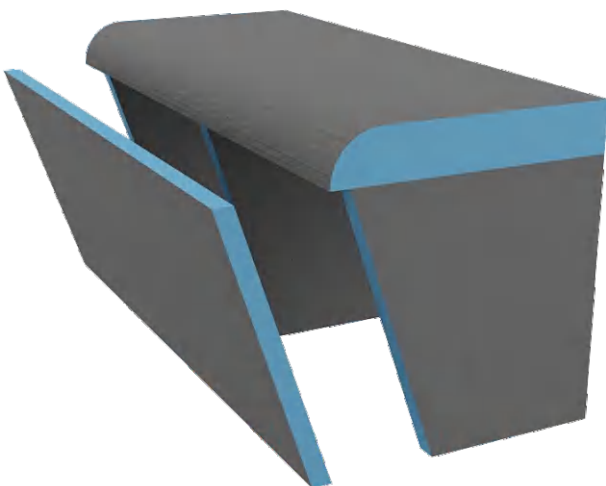

3. Glue the 30mm sloping piece as picture.
After leaving it undisturbed for one night (8 to 12 hours), you can proceed with the tile installation work.

Maintenance, Care & Cleaning

- Store boards indoors in a dry, well-ventilated and shaded area.
- Stack boards horizontally on a flat, level surface, supported evenly by wooden battens or spacers to avoid concentrated stress. Do not stack heavy loads on top, step on or drop boards, to prevent surface damage, cracking or core breakage.
- Keep boards away from strong acids, alkalis, solvents, oils and other chemicals to avoid contamination or corrosion that may reduce tile bonding strength.
- Inspect the board surface before installation to ensure it is clean, dry, free of dust, grease, oil or release agent residues. Remove loose dust with a soft cloth or brush.
- After fixing the boards in place, ensure the surface is flat and joints are aligned. All fastener heads must be countersunk and properly sealed to prevent future hollowing or loosening.

For more information

- visit betterbathrooms.com
- email customerservices@buyitdirect.co.uk
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

**better
bathrooms**

Part of the BuyItDirect Group