

USER MANUAL



Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.

**better
bathrooms**

General Instructions for Freestanding Baths with Pre-Fitted Waste Assembly



Image for installation reference only

- **Two-person assembly**
- **Tools required**
- **We always recommend using professional tradespeople to install your product**

V1_16.06.2026

Congratulations on your purchase

And welcome to our growing gang of savvy shoppers

We're on a mission to bring you extraordinary bathroom products, for less. From modern to traditional style ceramics, plus the gorgeous fixtures, fittings and furniture to match. So, you can fall in love with your space every single day.

As one of the UK's largest independent bathroom stores, we've received countless awards; including the National Business Awards UK, the Digital Entrepreneur Awards and being placed on The Sunday Times Fast Track 100.

We hope your new product goes above and beyond your expectations. However, should any problems occur, please:

- log in to your account and contact our customer services team via your self-serve portal – betterbathrooms.com/CustomerAccount/Login
- contact us via betterbathrooms.com/content/contact-us

Important information

- Please read these instructions thoroughly and retain for future reference
- Always check for pipes and cables before drilling
- Freestanding bath is not designed to take weight on the rim, Do not sit or stand on the bath rim.

Receive Your Bath

Unpack and check for damage.

After receiving your bath, please unpack and remove all covering, checking whether there is any damage. Repack the bath if it is not being immediately installed. It will be rejected any claim for damage if not notified in a timely manner.

Protect your bath.

Before commencing and installation, ensure the bath is completely protected, leave covering in place until the bathroom is complete. Scratches and damage incurred during installation are not covered by the warranty.

Contents

- Component Listing
- Tools Required
- Installation Notices
- Installation Instructions
- Maintenance, Care & Cleaning

Component Listing

- Freestanding Bath – Main product x 1

Tools required

Safety Notice:

Prior to drilling into walls, check there are no hidden electrical wires, cables or water supply pipes. Always wear protective equipment such as safety glasses and hearing protection whilst using power tools.



Adjustable Wrench



Tape Measure




Pencil



Damp Cloth



Silicone Sealant
(100% Neutral Cure)



Level

Installation Notices

Protect Your Bathtub

- Ensure the bathtub is fully protected prior to installation. Keep all protective packaging in place until all bathroom works are finished.
- Installation-related scratches and damage are not warrantied.


Ensure the floor is level prior to installation, otherwise the final result will be affected.

Installation Instructions

1. Locate the bathtub and connect it to the drain. As shown in Fig.1.

· Note: Drain piping is sold separately per required dimensions. All drain connection work shall be performed exclusively by qualified professionals.


Fig.1

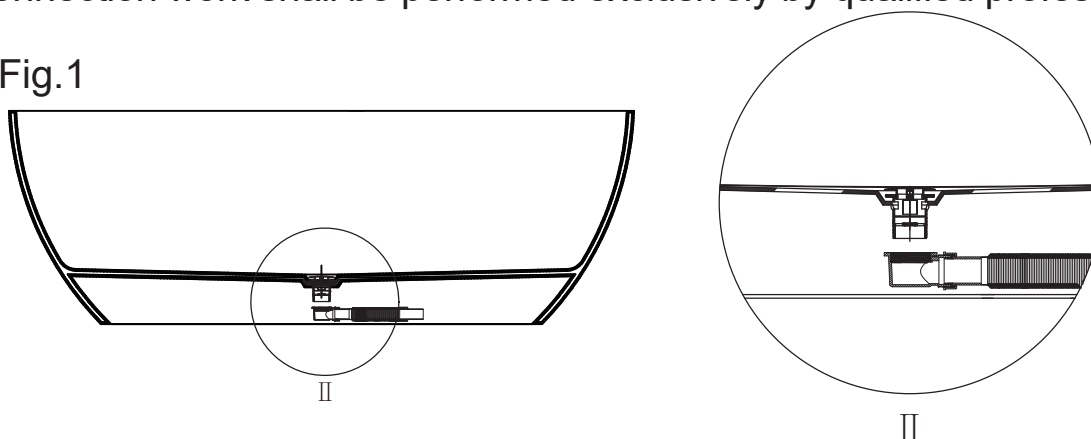

2. Fill the bathtub with water and inspect that water drains smoothly toward the drain. As shown in Fig.2.


· Note: A small amount of standing water is normal due to surface tension.

Fig.2

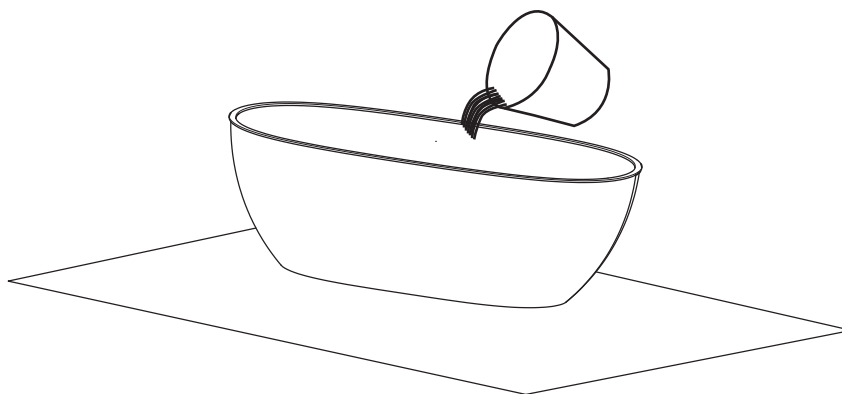

3. Run a thick silicone sealant bead along the entire bathtub rim, then leave to cure fully for 24 hours. As shown in Fig.3.

Fig.3

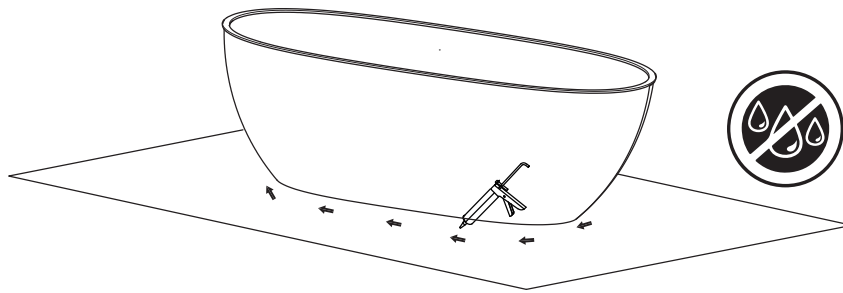

Maintenance & Cleaning

- ① To preserve the polished surface, after using your bath, clean with soft cloth and warm soapy water to wash away any body oils or soap residue that forms a ring tide mark.
- ② Do not use powders, pastes, crème cleaners, thinners, window cleaning sprays or dry cleaning liquid, etc.
- ③ When coloured essentials oils are used, first test that the colour won't stain your bath. Always add oils into a bath full of water. Never pour them into an empty bath.

Water testing

Water test your bath prior to enclosing to ensure it drains correctly as no claims for non-draining baths will be valid after enclosing or tiling has been done;
Water test overflow pipe and waste to ensure they are not leaking.

! Warning

The bathtub drain assembly is not factory pre-fitted. Compatible drain piping must be purchased separately to match on-site dimensions.

The drain assembly must be firmly secured to the bathtub by certified professional installers, then sealed with silicone sealant to stop water leaks.

Before use please test the bath to ensure the waste has been properly installed.

"PLEASE NOTE THE BATH WASTE/PLUG ARE PREFITTED TO THE BATH"

"THE BATH TRAP (BATH WASTE TO WASTE PIPE FITTING) IS NOT SUPPLIED"

"IF THE WASTE/PLUG IS NOT FITTED, A HOLE WILL BE VISIBLE IN THE BASE OF THE BATH"

"AN IMAGE OF THE PRODUCT WILL BE REQUIRED IF MAKING A REQUEST FOR A MISSING WASTE"

Waste fitted under bath



Waste/Plug inside the bath



IMPORTANT section : Make sure the waste fitting is properly installed, sealed and tightened as instructed before using the bath.

For more information

- visit betterbathrooms.com
- email customerservices@buyitdirect.co.uk
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

**better
bathrooms**

Part of the BuyItDirect Group